




Connect for Life™

Cable Assembly for Finisar® BOA

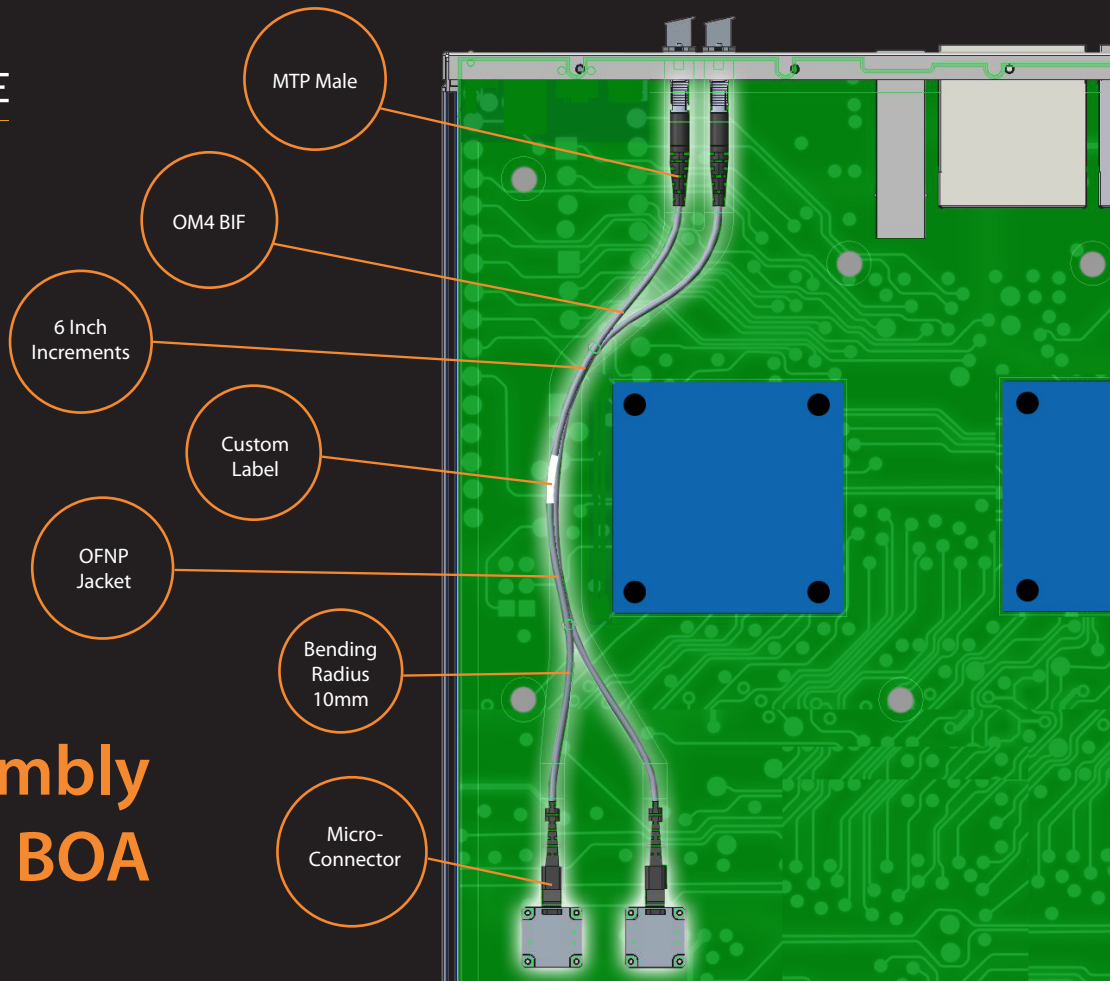

MTP Male

OM4 BIF

6 Inch
Increments


Custom
Label

OFNP
Jacket

Bending
Radius
10mm

Micro-
Connector

Finisar® 10G BOA




12 TxRx




MC12 Single


Finisar® 10G BOA



12 Tx




12 Rx

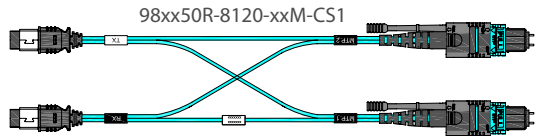


MC12 Dual

Finisar® 25G BOA



24 TxRx




MC24 Single


Finisar® 25G BOA



24 Tx



24 Rx

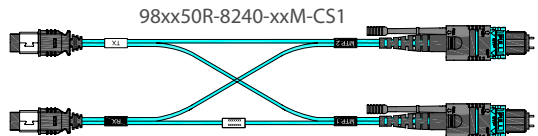

MC24 Dual

Optical Specifications (850 & 1300 nm)

Insertion Loss	Typical	0.10 (dB)
	Max	0.35 (dB)
Return Loss	Max	-20 (dB)

Mechanical Specifications

Max. Tensile Strengths, Short Term
12F: 150N 24F: 210N

Max. Tensile Strengths, Long Term
12F: 80N 24F: 100N

Min. Bend Radius
BIF: 10mm

Temperature Range
Storage: -40 °C to 70 °C
Operation: -20 °C to 70 °C

