




WAVE 2 WAVE®

Connect for Life™

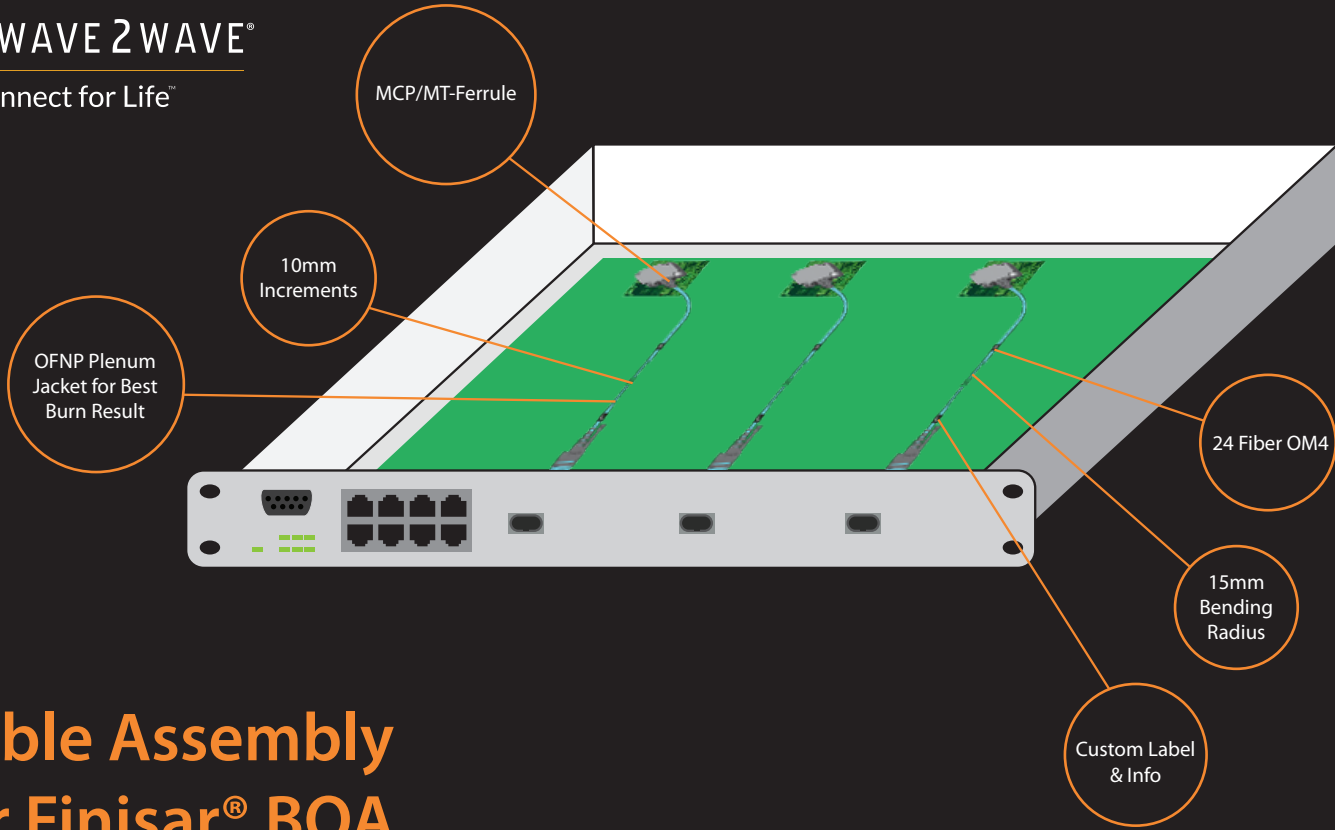

MCP/MT-Ferrule

10mm
Increments

OFNP Plenum
Jacket for Best
Burn Result


24 Fiber OM4

15mm
Bending
Radius

Custom Label
& Info


Cable Assembly for Finisar® BOA

Finisar® 10G BOA




12 TxRx

Finisar® 25G BOA




12 TxRx

Finisar® 25G BOA




12 TxRx



MT-Ferrule

MT-Ferrule Version

Male MTP Connector



Pluggable MT Connector

Pluggable MT Version

Male MTP Connector

XX= Multiples of 10mm

Optical Specifications (850 nm)

Insertion Loss	<i>Typical</i>	0.10 (dB)
	<i>Max</i>	0.35 (dB)
Return Loss	<i>Max</i>	-20 (dB)

Fiber Cable Specifications

Fiber Type

24 Fiber OM4

Jacket Type

OFNP Plenum

Tolerance in Length

±5mm

Min. Bend Radius

BIF Cable: 15 mm (0.6 in)

Temperature Range

Storage: -40 °C to 70 °C

Operation: -20 °C to 70 °C

Max. Tensile Strengths, Short Term

24F: 210N

Max. Tensile Strengths, Short Term

24F: 100N